



T30 LGP

T50 LGP



T80 LGP

## TOP MOUNT GLASS-DOOR VERTICAL MERCHANDISERS

### Low-Temperature Glass-Door Freezers

Globals low temperature glass door merchandisers are designed to enhance your product sales through improved merchandising. The cabinets offer an extra large viewing area and the brilliant LED lighting illumination magnifies the appeal of your products.

Top mount merchandisers are available in one, two and three door models. The option of several sizes makes it easy to create merchandising walls of variable length using standard units. Adjustable cantilever shelves provide an extra realm of flexibility.



All products are certified for energy , safety and sanitation. NSF/ ANSI 7 Standards

### FEATURES

- 20 gauge steel interior/exterior with white powder coat paint
- LED Lighting
- Patented Kelvinator refrigeration design
- Full height triple pane heated glass doors & heated perimeter and mullions
- Digital temperature controller with defrost options & LED display
- Temperature Range 0°F to -20°F
- Auto switch turns off fans when door opened eliminating frost/icing
- Fan(s) & extended evaporator coil eliminate frost on walls of cabinet
- Expansion valve provides quick pull down & reduces compressor run time
- Fin coil and forced air evaporator improve air flow & performance
- Highest capacity evaporator coil improves performance of unit
- Heated drain pan dissipates condensation, no plumbing required
- (4) adjustable cantilever shelves & (1) bottom shelf per door
- Energy star

### ACCESSORIES

- Cantilever Shelf
- Bottom Shelf
- Shelf Kits
- Caster Kit
- Skirt Kits
- Stainless Steel Exterior

# TOP MOUNT VERTICAL MERCHANDISERS

## TECHNICAL DATA



MODEL	T30 LGP	T50LGP	T80 LGP
<b>Temp Range</b>	0°F to -20°F	0°F to -20°F	0°F to -20°F
<b>Exterior Dimensions</b>			
Length	31"	52"	78"
Depth	36 <sup>1</sup> / <sub>4</sub> "	36 <sup>1</sup> / <sub>4</sub> "	36 <sup>1</sup> / <sub>4</sub> "
Height	83 <sup>3</sup> / <sub>4</sub> "	83 <sup>3</sup> / <sub>4</sub> "	83 <sup>3</sup> / <sub>4</sub> "
<b>Interior Dimensions</b>			
Length	26 <sup>1</sup> / <sub>4</sub> "	47 <sup>1</sup> / <sub>4</sub> "	73 <sup>1</sup> / <sub>4</sub> "
Depth	29 <sup>5</sup> / <sub>8</sub> "	29 <sup>5</sup> / <sub>8</sub> "	29 <sup>5</sup> / <sub>8</sub> "
Height	60 <sup>5</sup> / <sub>8</sub> "	60 <sup>5</sup> / <sub>8</sub> "	60 <sup>5</sup> / <sub>8</sub> "
<b>Capacity</b>	27.3 cu. ft.	49.1 cu. ft.	76.2 cu. ft.
<b>Shipping Weight</b>	650 lbs.	900 lbs.	1,200 lbs.
<b>Electrical</b>	115V	208-230/115V	208-230/115V
<b>Fuse Size</b>	20	20-30	20-30
<b>Rated Amps</b>	13.5	9.5	16.0

## SPECIFICATIONS

### T30, T50, T80LGP

Top mount low temperature merchandiser, Global model T\_\_\_LGP. The unit shall consist of white powder coat finished galvanized steel interior & exterior, foamed in place. The unit will be supplied with 4 cantilever shelves and a bottom shelf per door opening.

Cabinet as specified to use R-404A refrigerant. Refrigeration control shall be thermostatic control with a temperature range of 0°F to -20°F. Cabinet to have independent on/off switch for compressor and lights.

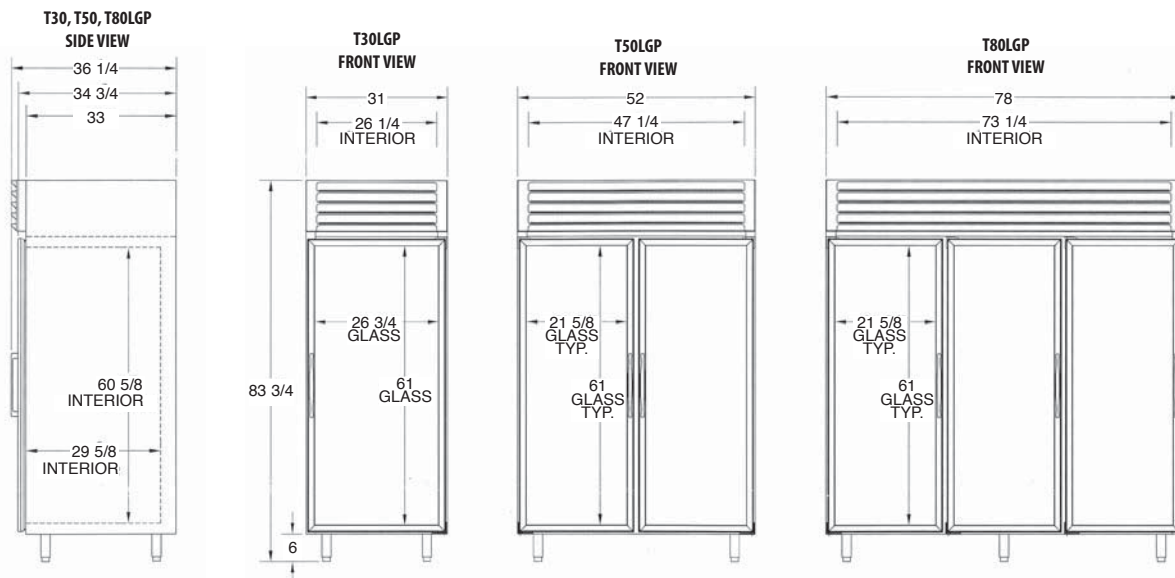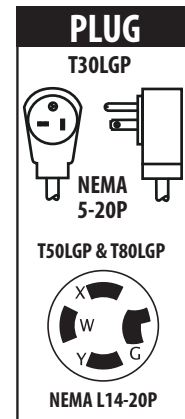

Cabinet designed for optimum performance in air-conditioned area at 70°F to 75°F ambient temperature and 50% to 55% relative humidity.

Global Refrigeration, Inc., reserves the right to change specifications, terms, and prices without notice.



5855 Grant Avenue, Cleveland, OH 44105

888.650.9799

www.globalref.com