

VISIDIPPER ICE CREAM DIPPING CABINETS/ GELATO CASES

The VisiDipper is the most innovative design for ice cream dipping in the industry. VisiDipper provides 75% more product viewing than standard canopy dipping cabinets.

The VisiDipper product line features both straight and curved glass models in 4-can, 8-can, 12-can and 16-can models to choose from.



All products are certified for energy , safety and sanitation. NSF/ ANSI 7 Standards

FEATURES

- 20 gauge steel cabinet with white powder coat paint interior/exterior
- LED Lighting
- Stainless steel curved or straight canopy with heated triple pane glass & stainless steel top
- Front glass is 4-1/2" lower and perimeter heaters are on top & sides of canopy
- Patented Kelvinator refrigeration design guarantees consistent temperature
- Temperature Range +10°F to -15°F
- Digital temperature controller with LED display
- Tempered glass lids
- Manual defrost/drain hose
- Energy star


ACCESSORIES

- Can Skirt Kits
- Dipperwell Kit
- Gelato Pan Rack Kits
- Frost Shield Kits
- Casters Kits
- Leg Kits
- Stainless Steel Exterior

VISIDIPPER ICE CREAM DIPPING CABINETS

TECHNICAL DATA

MODEL	KDC/CKDC27V	KDC/CKDC47V	KDC/CKDC67V	KDC/CKDC87V
Temp Range	+10°F to -15°F	+10°F to -15°F	+10°F to -15°F	+10°F to -15°F
Exterior Dimensions				
Length	25.75	46.5"	67"	88"
Depth	26.75	26.75"	26.75"	26.75"
Height	51.81	51.81"	51.81"	51.81"
Capacity				
Capacity (3-gal. tubs)	4	12	20	28
Facings (3-gal. tubs)	4	8	12	16
Storage (3-gal. tubs)	0	4	8	12
Compressor				
Compressor	Hermetic	Hermetic	Hermetic	Hermetic
Shipping Weight				
Shipping Weight	235 lbs.	365 lbs.	525 lbs.	635 lbs.
Condensor Type				
Condensor Type	Bare Tube	Bare Tube	Bare Tube	Bare Tube
Lighting				
Lighting	LED	LED	LED	LED
Electrical				
Electrical	115/60/1	115/60/1	115/60/1	115/60/1
Rated Amps				
Rated Amps	5.0	11.5	12.5	12.5

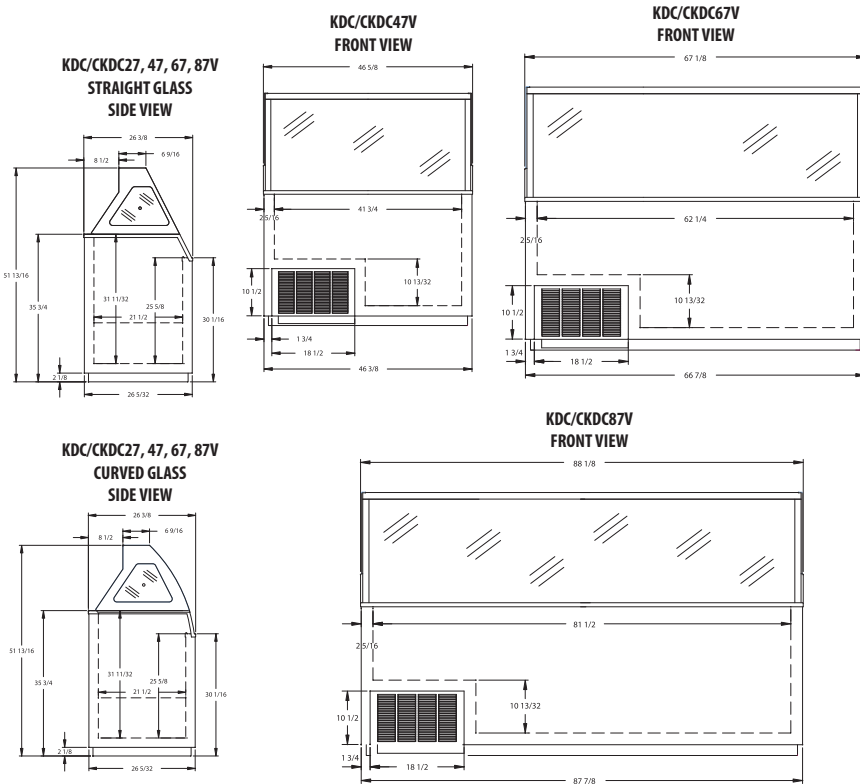


SPECIFICATIONS

KDC/CKDC27, 47, 67, 87V

Furnish () quantity. VisiDipper Ice Cream Dipping Cabinets, Kelvinator model _____ KDC _____ V. The unit construction shall consist of a 20-ga. white powder-coat finished galvanized steel interior and exterior, foamed in place. The unit will be supplied with an air piston-assisted, tempered, scratch-proof service-side lid and a stainless-steel top service area.

Cabinet as specified to use R-404a refrigerant. Refrigeration control shall be thermostatic control with a temperature range of 10°F to -15°F. Cabinet to have independent on/off switch for compressor and light switch to be mounted in the shell of the cabinet and to be furnished with a drain connection. Cabinet to be provided as a rear-air intake and front-air discharge (consult factory for rear-air intake and discharge).



Cabinet designed for optimum performance in air-conditioned area at 70°F to 75°F ambient temperature and 50% to 55% relative humidity.



Global Refrigeration, Inc., reserves the right to change specifications, terms, and prices without notice.

5855 Grant Avenue, Cleveland, OH 44105

888.650.9799

www.globalref.com