DROP-IN CABINET

DI-4

The Global DI-4 drop -in cabinet is designed for storing chilled dishes, mugs , ice cream storage and medical applications.

Forced convection condenser unit permits air intake and exhaust through front even when installed on a raised solid base.

Bare-tube design makes it easy to keep clean.

The cabinet is designed to fit below standard 34 inch countertop and installs in 30 inch deep backbar or counter.

FEATURES

All products are certified for energy , safety and sanitation. NSF/ ANSI 7 Standards

- Digital temperature controller with LED display Auto door switch turns off
- Interior Cavity Temperature 0 F to -20 F
- White powder paint interior with galvannealed exterior
- Kelvinator Refrigeration Design
- Stainless Steel top and Stainless Steel Lids foamed in place with Vinyl Chanmber Guards
- Compressor and thermostat are available through front opening
- Drain Connection

Kelvinator

DROP-IN CABINET

TECHNICAL SPECIFICATIONS

MODEL	DI-4
Temp Range	0°F to –20°F
Exterior Dimensions	
Length	28.19″
Depth	28.19″
Height	28.38″
Capacity	4.9 cu.ft.
Compressor	Hermatic
Shipping Weight	255 lbs.
Condensor Type	Bare Tube
Electrical	Conduit Connected, Max Fuse Size 15A
Rated Amps	4.5
Volts	115/60/1

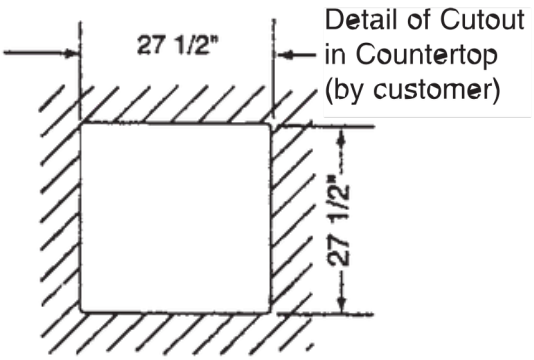

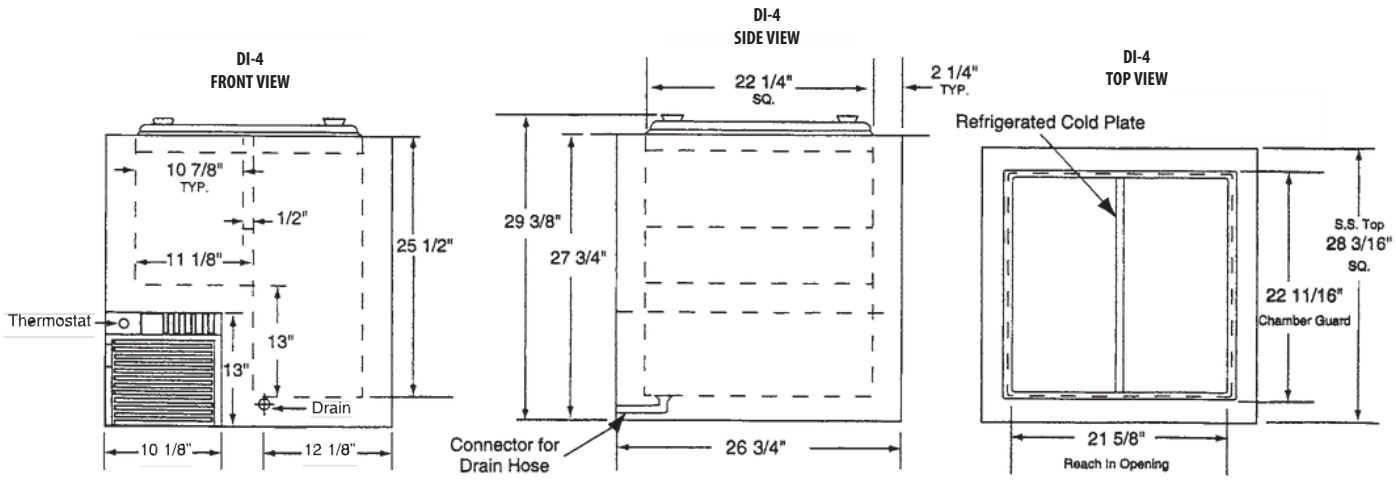

Cabinet designed for optimum performance in air-conditioned area at 70˚F to 75˚F ambient temperature and 50% to 55% relative humidity.
Global Refrigeration, Inc., reserves the right to change specifications, terms and prices without notice.