GLOBAL LGP TOP MOUNT GLASS DOOR MERCHANDISERS

T80 LGP

T50 LGP

T30 LGP

Global Refrigeration's LGP Top Mount Glass Door Merchandisers are engineered to maximize product visibility and drive sales, featuring one of the largest glass viewing areas in the industry. True "clear white" Global LED lighting brilliantly illuminates and visually magnifies products, increasing customer interest and boosting revenue.

Triple-pane glass doors with heated perimeter and mullions prevent condensation for a consistently clear view, while a digital temperature controller with programmable defrost allows precise, easy adjustments for optimal product temperature and energy-efficient operation.

Available in one-door (T30LGP), two-door (T50LGP), and three-door (T80LGP) models, LGP merchandisers make it simple to create merchandising walls of variable lengths to match your store layout and maximize selling space.

FEATURES

All products are certified for energy , safety and sanitation. NSF/ ANSI 7 Standards

- 20 Gauge steel interior and exterior foamed in place with white powder coat paint
- LED lighting
- Full height triple pane heated glass doors with heated perimeter and mullions
- Digital temperature controller with programmable defrosts and
- LED display auto switch turns off fans if door opened eliminating frost & icing issues
- Heated drain pan dissipates condensation, no plumbing required
- Top mount compressor (4) adjustable cantilever shelves & (1) bottom shelf per door
- Temperature Range 0˚F to -20˚F

OPTIONAL ACCESSORIES

Cantilever Shelf and Shelf Kits • Caster Base Kit • Black Color Option • Stainless Steel Exterior Option

Kelvinator

GLOBAL LGP TOP MOUNT GLASS DOOR MERCHANDISERS

TECHNICAL SPECIFICATIONS

MODEL	T30LGP	T50LGP	T80LGP
Temp Range	0°F to –20°F	0°F to –20°F	0°F to –20°F
Exterior Dimensions			
Length	31°	52°	78°
Depth	36.25°	36.25°	36.25°
Height	83.75°	83.75°	83.75°
Interior Dimensions			
Length	26.25°	47.25°	73.25°
Depth	29.75°	29.75°	29.75°
Height	60.75°	60.75°	60.75°
Capacity	27.3 cu.ft.	49.1 cu.ft.	76.2 cu.ft.
Shipping Weight	650 lbs.	900 lbs.	1200 lbs.
Electrical	115v/60/1	115v/60/1	115v/60/1
Fuse Size	20	30	30
Rated Amps	10.5	14	

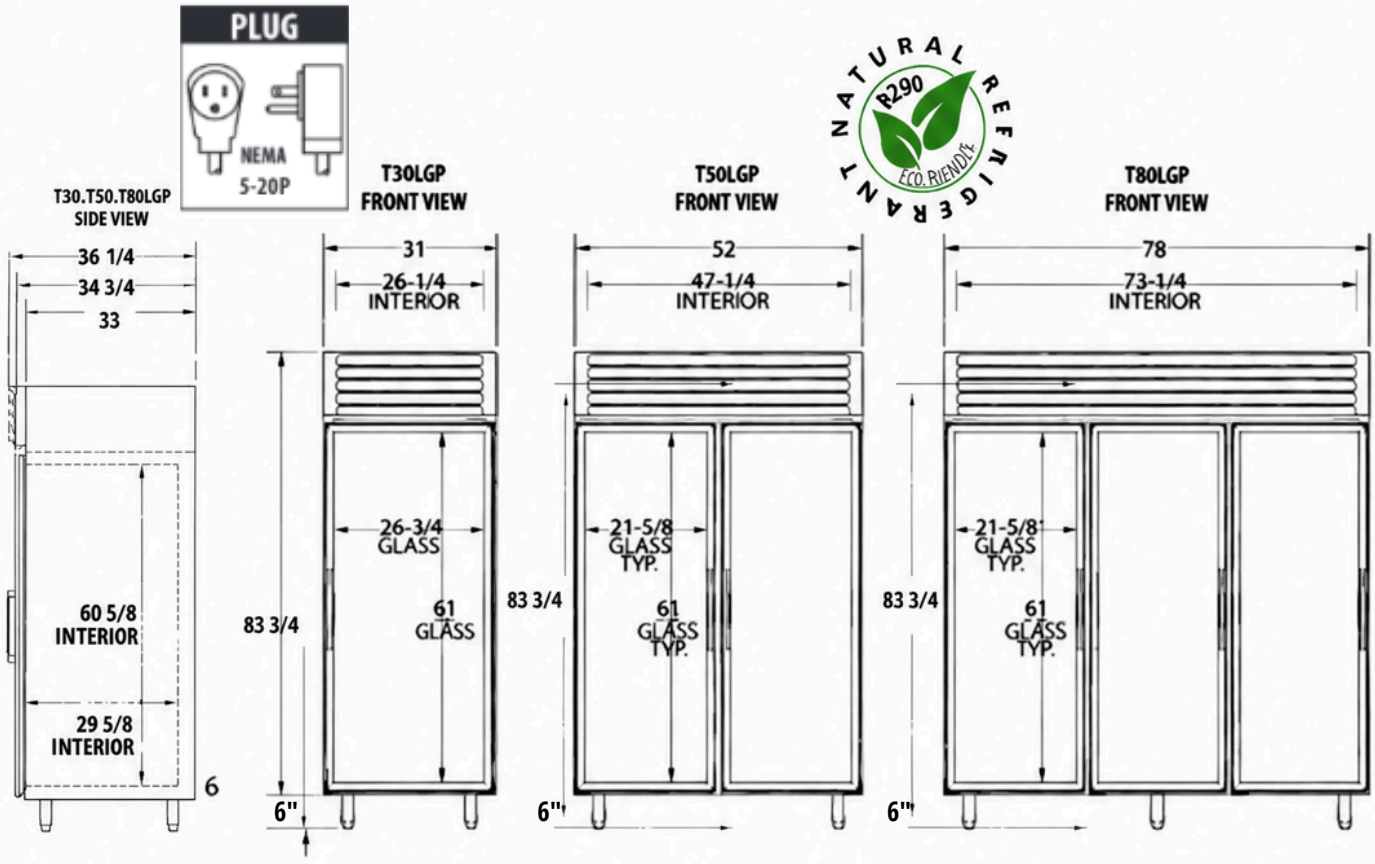

Cabinet designed for optimum performance in air-conditioned area at 70° F to 75° F ambient temperature and 50% to 55% relative humidity.
Global Refrigeration, Inc., reserves the right to change specifications, terms and prices without notice.