SOLID-DOOR REACH-IN FREEZERS

T80 LSP

T30 LSP

T50 LSP

Solid door vertical low temperature freezers manufactured by Global Refrigeration are unsurpassed in performance, reliability, durability and offer the best return on investment in the industry.

The cabinets are available in one door (T30LSP), two door (T50LSP) and three door (T80LSP) models. The patented Kelvinator design and Global innovations offer interior cabinet temperatures ranging from 0 F to -20 F.

All products are certified for energy , safety and sanitation. NSF/ ANSI 7 Standards

FEATURES

- 20 gauge steel with white powder coat paint interior & exterior
- Patented Kelvinator technology guarantees consistent temperature
- Solid high density foamed in place solid doors with heated perimeter and mullion (s)
- Digital temperature controller with programmable defrost options & LED desplay
- Auto door switch turns off fans when doors open eliminating icing issues
- Top mount compressor
- Heated drain pan dissipates condesation, no plumbing required

OPTIONAL ACCESSORIES

CASTER KIT SETS • CANTILEVER SHELF & SHELF KITS • BLACK COLOR OPTION • STAINLESS STEEL EXTERIOR OPTION

SOLID-DOOR REACH-IN FREEZERS

TECHNICAL SPECIFICATIONS

MODEL	T30LSP	T50LSP	T80LSP
Temp Range	0°F to –20°F	0°F to –20°F	0°F to –20°F
Exterior Dimensions			
Length	31"	52"	31"
Depth	36.88"	36.88"	36.88"
Height	83.75"	83.75"	83.75"
Interior Dimensions			
Length	26.625	47.25	73.25
Depth	29.625	29.625	29.625
Height	60.625	60.625	60.625
Number of Doors	1	2	3
Door Construction	foam-in place, urethane	foam-in place, urethane	foam-in place, urethane
Hinge Type	Spring loaded, cam	Spring loaded, cam	Spring loaded, cam
Number of Shelves	4+1 bottom rack	8+1 bottom rack	12+1 bottom rack
Shelf Type	Cantilever, Epoxy Coated Steel Wire	Cantilever, Epoxy Coated Steel Wire	Cantilever, Epoxy Coated Steel Wire
Insulation	foam-in place, urethane 2.375	foam-in place, urethane 2.375	foam-in place, urethane 2.375
Wall Thickness	27.3	49.1	27.3
Capacity (cu. ft.)	161	324	486
Capacity (1/2 gal. pkg.)	526 lbs.	755 lbs.	900 lbs.
Shipping Weight	10.5	12	12
Amp draw	115/60/1	115/60/1	115/60/1
Electrical	NEMA 5-20P	NEMA 5-20P	NEMA 5-20P
Electrical Information	High-quality Powder-coat	High-quality Powder-coat	High-quality Powder-coat
Interior Finish	Finish on Galvanized Steel	Finish on Galvanized Steel	Finish on Galvanized Steel

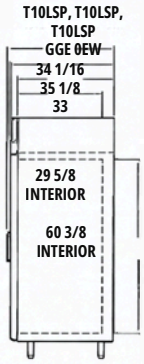

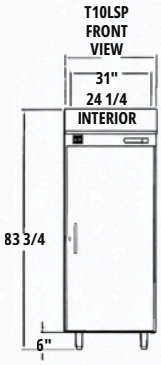

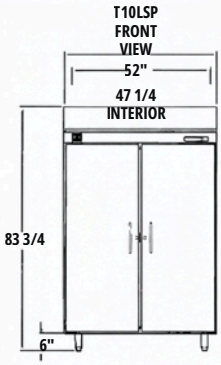

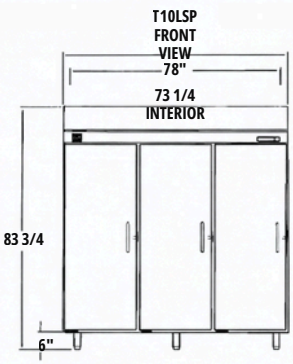



Cabinet designed for optimum performance in air-conditioned area at 70°F to 75°F ambient temperature and 50% to 55% relative humidity.
Global Refrigeration, Inc., reserves the right to change specifications, terms and prices without notice.